


# MODESTO

## Features



- Extruded aluminum square or round housing, with tamper resistant hardware. Flat top or optional dome top for round MO2. Single screw access for top relamping.
- Thread-on glass diffuser and matte black polycarbonate louvers enclose lamp.
- Medium porcelain socket, pulse rated with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell.
- HPF ballast, starting rated at -20°F (-40°F for HPS). Metal Halide is CWA or Super CWA type. HPS is CWA, HR or Reactor type.
- Concealed, galvanized steel anchor base. Four 1/2" x 10" anchor bolts, on 4" diameter, square pattern.
- TGIC thermoset polyester powder paint finish with choice of five standard and two premium standard colors.
- UL and CSA listed for wet locations.

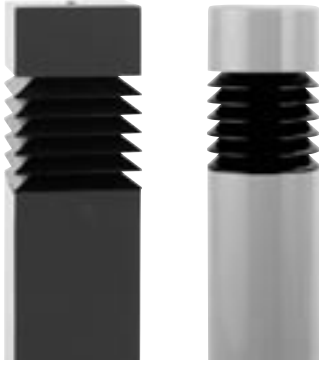

BOLLARDS

Contemporary bollard for steps, walkways and entrances.

## Ordering Information

**Example:** **1** FN1 - **2** P50 - **3** TO - **4** Q - **5** PS - **6** DM - L

Series    Lamp/Watt.    Optical System    Voltage    Color    Options

- 1 Series**  
MO1 = Modesto 1  
MO2 = Modesto 2
- 2 Lamp Source/Wattage**  
Metal Halide  
H17  
Pulse Start  
P50  
P70  
P10  
P12  
P15  
High Pressure Sodium  
S35  
S50  
S70  
S10  
S15
- 3 Optical System**  
EL = External Stacked Louvers
- 4 Voltage**  
Q = Quad-Tap  
T = Tri-Tap
- 5 Color**  
**Standard:**  
WH = White  
DB = Dark Bronze  
PS = Platinum Silver  
GR = Gray  
BL = Black  
**Premium:**  
FG = Forest Green  
RD = Red  
**Custom Color:**  
Consult Factory
- 6 Options**  
L = Lamp (included)  
DM = Dome (MO2 only)  
HS = House-side Shield (120° or 180°)  
24 = 24" Height  
30 = 30" Height  
36 = 36" Height

**NOTE:** when ordering less anchor bolts, note LAB at end of catalog logic.

## Dimensions

	A	B	C	D	Wt./Lbs.
<b>MO1</b>	6.75" sq.	42"	6"	4"	41
<b>MO2</b>	7" dia.	42"	6"	4"	41

